

# Situo® RTS II



**Pure** - Item #: 1870571 (1 channel), 1870575 (5 channel)

**Iron** - Item #: 1870572 (1 channel), 1870576 (5 channel)

**Natural** - Item #: 1870573 (1 channel), 1870577 (5 channel)

**Arctic** - Item #: 1870574 (1 channel), 1870578 (5 channel)

## OVERVIEW:

**Situo® RTS II** offers simple, convenient control for motorized window coverings, awnings, exterior screens, rolling shutters and pergolas. Available in multiple finishes sporting a sleek, modern look, it adds a touch of elegance to every décor.

### FEATURES SUMMARY:

- Control one motorized product, or one group of motorized products per channel
- Available in Pure (shown), Iron, Natural and Arctic finishes
- Features exclusive "MY" favorite position or STOP button
- Optional wall mounting clip included
- Set and adjust limits on RTS motors

### WHAT'S IN THE BOX:

- Remote (with battery)
- Instructions
- Wall mount
- Screw set

### TECHNICAL SPECIFICATIONS:


- Power: 3V #2032 Lithium battery
- Protection Rating: IP 30
- Material: ABS
- Dimensions:
  - L: 5.35 in. (136 mm)
  - W: 1.66 in. (42 mm)
  - H: .67 in. (17 mm)
- Maximum Range: Operates reliably at 20 feet (up to 65 feet under optimal conditions)
- Operating Temperature Range: 32° to 140°F
- Frequency: 433.42 Mhz +/- 100kHz
- Shipping Weight: 1 lb



Also available in these attractive colors




## CONNECTIONS AND INDICATORS:

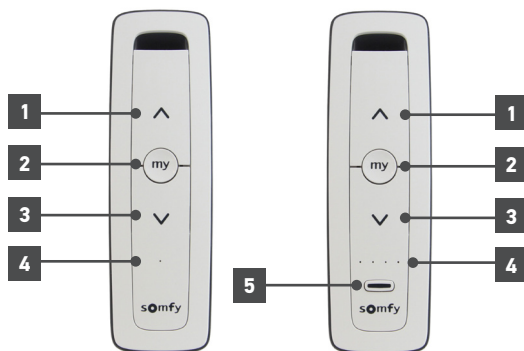

ELEMENT	FUNCTION
1 <b>UP Button</b>	UP directional button
2 <b>"MY" Button</b>	"MY" favorite position or STOP button
3 <b>DOWN Button</b>	DOWN directional button
4 <b>LED Indicators</b>	Illuminates to confirm RTS signal transmission
5 <b>Channel Selector Button</b>	Selects channel to operate

## DIMENSIONS:

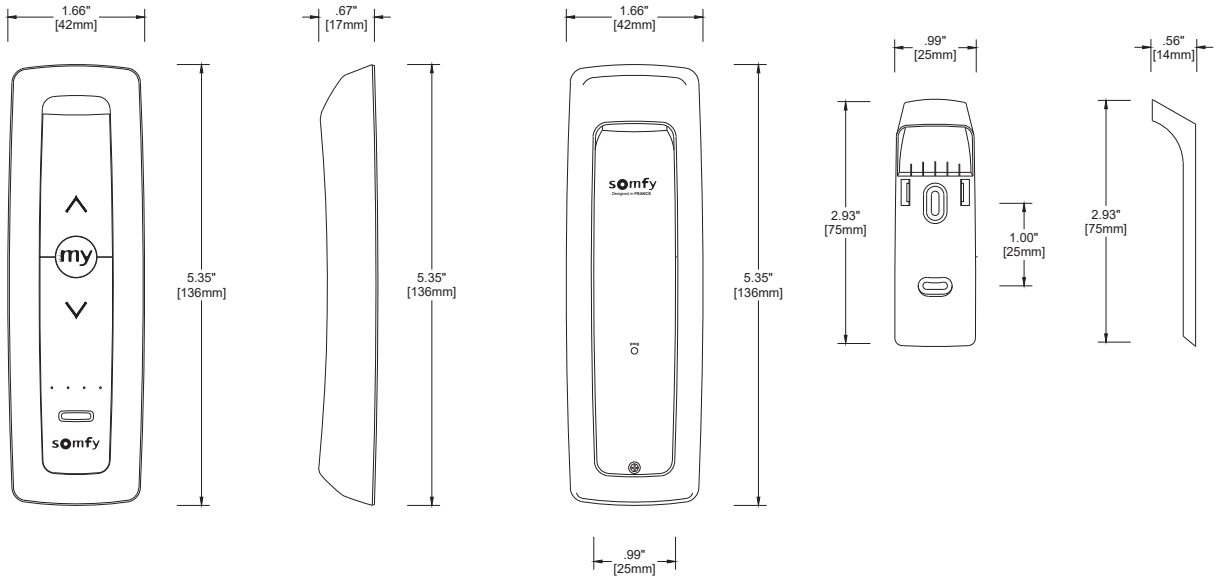

## BEST WIRING PRACTICES

The diagram shown below is meant for illustrative purposes to show the connections from product to product. This device could be used in other configurations than shown below. For specification information on individual products, see related product information.

